

Serie | 4 Hoods

DHU665CGB
Conventional hood, 60 cm



The built-under cooker hood: save space by mounting the hood beneath your upper cabinet or on the wall.

- **Extraction rate:** at 350 m3/h, it quickly ensures optimal kitchen air quality.

Technical Data	
Typology :	Traditional
Approval certificates :	, CE
Length electrical supply cord (cm) :	130
Net weight (kg) :	9.0
Type of control :	mechanical
Number of speed settings :	3
Maximum output air extraction (m3/h) :	350
Maximum output recirculating air (m3/h) :	260
Number of lights :	2
Noise level (dB) :	68
Diameter of air outlet (mm) :	120
Grease filter material :	Washable aluminium
Odour filter :	Yes
Operating Mode :	Convertible
Optional accessories :	DHZ2700
Type of lamps used :	Halogen
Total power of the lamps (W) :	56
Grease filter type :	Kassette
Connection Rating (W) :	306
Voltage (V) :	220-240
Frequency (Hz) :	50
Plug type :	GB plug
Installation typology :	Built-under
Material body :	Stainless steel
Approval certificates :	, CE
Plug type :	GB plug
Dimensions of the product, with chimney (if exists) (in) :	/ x x
Dimensions of the packed product (in) :	21.65 x 8.07 x 25.19
Net weight (lbs) :	20
Gross weight (lbs) :	22
Motor location :	Integrated motor in hood body
No-return airflow flap :	No
Length electrical supply cord (cm) :	130
Dimensions of the product, with chimney (if exists) (mm) :	150 x 600 x 482
Net weight (kg) :	9.0
Gross weight (kg) :	10.0



Optional accessories
 DHZ2700 : Active carbon filter

Serie | 4 Hoods

DHU665CGB

Conventional hood, 60 cm

The built-under cooker hood: save space by mounting the hood beneath your upper cabinet or on the wall.

Features

- 600 mm wide
- Suitable for ducted or re-circulated extraction
- Push button controls for 3 speeds
- Twin motor
- Ducted extraction rate according to DIN/EN 61591: max. 350 m³/h
- Adjustable glass visor
- Metal grease filter, dishwasher safe
- 2 x 40 W lights


Technical Information

- Noise level according to EN 60704-3 und EN 60704-2-13 at max. normal use exhaust air: 68 dB(A) re 1 pW (56 dB(A) re 20 µPa sound pressure)
- Dimensions exhaust air (HxWxD): 150 x 600 x 482 mm
- Dimensions recirculating (HxWxD): 150 x 600 x 482 mm
- 120 mm diameter pipe
- Power rating: 306 W


Serie | 4 Hoods

DHU665CGB

Conventional hood, 60 cm

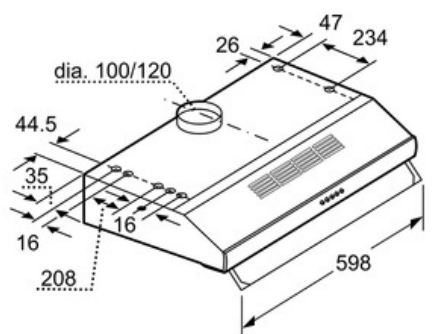

measurements in mm

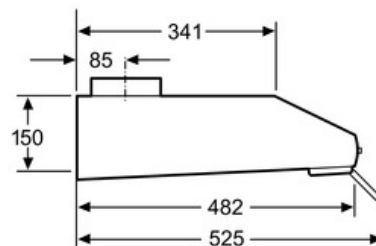

measurements in mm