

Serie | 8, Downdraft hood, 90 cm,
clear glass black printed
DDD97BM60B

A



Optional accessories

- DSZ9ID0M0 :
- DSZ9ID0P0 :
- DSZ9ID0Q0 :

The DownDraft hood provides an open view into the kitchen and clear views from the hob thanks to a high extraction rate. When not in use it simply disappears into the worktop.

- **Intensive speed setting:** removes strong kitchen odours quickly and effectively.

Technical Data

Approval certificates :	CE
Length of electrical supply cord (cm) :	150
Required niche size for installation (HxWxD) :	738mm x 844.0mm x 104mm
Net weight (kg) :	35.295
Type of control :	Electronic
Number of speed settings :	3-stage + 2 intensive
Maximum output air extraction (m3/h) :	530
Boost position output recirculating (m3/h) :	500.0
Maximum output recirculating air (m3/h) :	452
Boost position air extraction (m³/h) :	750
Number of lights (Stck) :	1
Noise level (dB(A) re 1 pW) :	62
Diameter of air outlet (mm) :	150
Grease filter material :	Washable aluminium
EAN code :	4242005074198
Connection rating (W) :	317
Current (A) :	10
Voltage (V) :	220-240
Frequency (Hz) :	50
Plug type :	GB plug
Installation type :	Built-in



4 242005 074198

Serie | 8, Downdraft hood, 90 cm, clear glass black printed DDD97BM60B

The DownDraft hood provides an open view into the kitchen and clear views from the hob thanks to a high extraction rate. When not in use it simply disappears into the worktop.

Key performance features:

- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 Ø 15 cm: max. Normal use 530 m³/h Intensive 750 m³/h
- Noise max. Normal Level: Noise, max. speed in normal use: 62 dB dB*

Features

- TouchControl for extractor speeds and light
- 3 power levels and 2 intensive settings
- 1 x 7W LED-module
- Automatic after running (Automatic after running (10 min))
- 2 removable metal grease filter cassettes
- Saturation indicator for metal and charcoal filter

Design

- Worktop ventilation
- For installation in a kitchen cabinet
- Suitable for regular or flush installation in worktops.
- Extension height 300 mm
- Rim ventilation
- Electronic control

Performance/technical information

- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit (accessory) needed
- In recirculation mode no combination with gas hobs allowed.
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air: Max. normal use: 62 dB(A) re 1 pW Intensive: 67 dB(A) re 1 pW
- Extraction rate in recirculation mode: Max. normal use: 452 m³/h Intensive: 500 m³/h
- Noise levels in recirculation mode: Max. normal use: 72 dB(A) re 1 pW Intensive: 75 dB(A) re 1 pW
- Power rating: 317 W
- Light Intensity: 203 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.5 m
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: D*
- Average Energy Consumption: 54.2 kWh/year*
- Diameter pipe Ø 150 mm (Ø 150 mm enclosed)
- Dimensions exhaust air (HxWxD): 738-1038 x 918 x 268 mm
- Dimensions recirculating (HxWxD): 738-1038 x 918 x 268 mm


Optional accessories

- Recirculating kit DSZ9ID0M0




* In accordance with the EU-Regulation No 65/2014

Serie | 8, Downdraft hood, 90 cm, clear glass black printed DDD97BM60B


Combination with electric hob




For use with gas hob see drawing
"Combination with gas hob".
measurements in mm

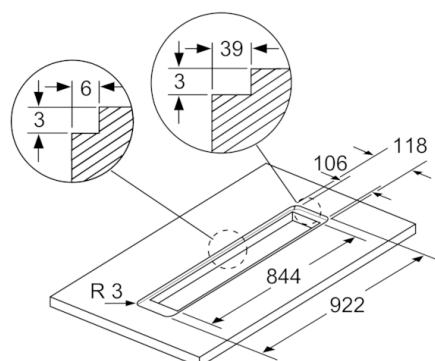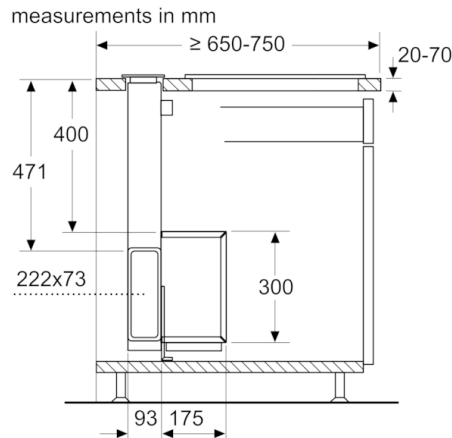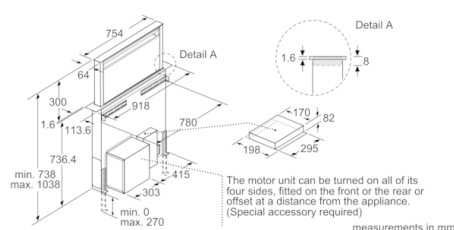

For flush installation in stone and granite
work surfaces
measurements in mm

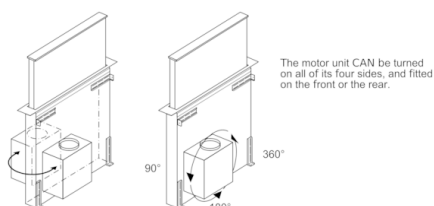


The motor unit CAN be turned
on all of its four sides, and fitted
on the front or the rear.

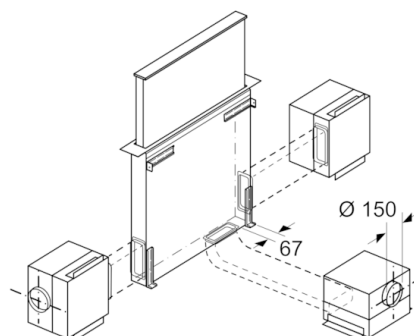

The motor unit can be fitted at
a maximum distance of three metres
from the appliance.
(Special accessory required)

Serie | 8, Downdraft hood, 90 cm, clear glass black printed DDD97BM60B


Combination with gas hob 75 cm



Use with gas hob only possible
in air extraction mode.
Total maximum output: 11.9 kW
Maximum output of wok 4.2 kW.
Total maximum output of rear hobs: 4.7 kW


measurements in mm

Combination with gas hob 90 cm



Use with gas hob only possible
in air extraction mode.
Total maximum output: 13.7 kW
Maximum output of wok 6 kW.
Total maximum output of rear hobs: 4.7 kW

measurements in mm

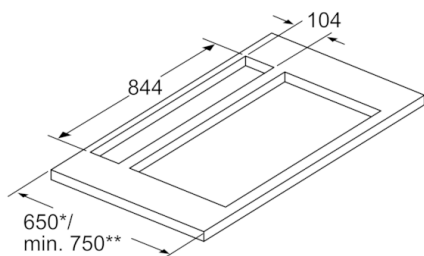

Only install one side of the appliance at
least 50 mm from a high-sided unit or a wall.

* 650 mm depth only in combination with
slim hobs.

** min. 750 mm for hobs with 500 mm
cut-out depth.

measurements in mm